

NN31545.1666

BIBLIOTHEEK
STARINGGEBOUW

ICW note 1666
Projectgroup Southern Peel 45
December 1985

II



nota

— instituut voor cultuurtechniek en waterhuishouding, wageningen —

PROGRAM SIMCROP - CALCULATION OF AGRICULTURAL CROP PRODUCTION
AND INCOME ON A REGIONAL LEVEL

ing. E.P. Querner and dr. R.A. Feddes

Nota's (Notes) of the Institute are a means of internal communication and not a publication. As such their contents vary strongly, from a simple presentation of data to a discussion of preliminary research results with tentative conclusions. Some Notes are confidential and not available to third parties if indicated as such



ISBN-244790*

20 JUN 1986

Table of Contents

	page
1. INTRODUCTION	1
2. OUTLINE OF CROP PRODUCTION MODEL	2
3. CALCULATION OF CROP PRODUCTION	5
3.1. General theory	5
3.1.1 Maximum possible growth rate	6
3.1.2 Potential and actual production	8
3.2. Yield of potatoes	8
3.3. Yield of other crops	11
3.4. Nutrient application	11
4. INCOME	13
5. EXAMPLES	14
5.1. Groundwater extraction	14
5.2. Sprinkling	15
6. REFERENCES	17
7. LIST OF SYMBOLS	19
Appendix A - Conversion factors and market prices	20
Appendix B - Typical parameters for potatoes	22

1. INTRODUCTION

Regional water management plays an important role in agricultural crop production. If certain changes in water management take place, then the question arises, what is the effect of these changes on agricultural crop production in a region. In connection with this : what is the effect on net income. It is well known that under conditions of water shortage a crop will show a reduction in transpiration and hence in crop production. If one is able to determine the relationship between transpiration and crop production it will be possible to evaluate the effect of water use on crop production. Effects of ground- and open water level manipulation can then be translated into effects on crop production, by means of the intermediate variable of transpiration.

To simulate agricultural crop production one needs to be informed about actual transpiration. Crop transpiration depends on the development stage, meteorological and soil water conditions. For the calculation of transpiration a hydrological model is required. For certain situations such a model is required, because water level manipulations can have different effect within an area. In some parts of the area it can have a positive effect, in other parts a negative effect on crop production. For instance groundwater extraction decreases groundwater levels and lowers the soil water in the root zone. Drier soil water conditions results in less evapotranspiration and hence lower crop production. It is also possible that the occurrence of water logging can be decreased by the reduction in soil water resulting in higher transpiration rates and crop production. Therefore the calculation of crop production for a region should be based on results of a regional hydrological model.

An outline of the model SIMCROP (Simulation of crop production and calculation of income) is given in Chapter 2. In Chapter 3 the general theory on crop production is presented and also yield reduction due to nitrogen supply. In Chapter 4 the income obtained through the agricultural production is discussed. In Chapter 5 calculated results are shown of sprinkling and other water management senarios.

2. OUTLINE OF CROP PRODUCTION MODEL

For the simulation of agricultural crop production actual transpiration data are required. The transpiration of a crop depends on the development stage of that crop, meteorological and soil water conditions. A hydrological model, in this case FEMSATP, is taken yielding evapotranspiration results. In principle, however any other model that calculates transpiration or evapotranspiration rates can be taken. In the case of evapotranspiration values partitioning in transpiration and soil evaporation is required. The model FEMSATP computes the regional water movements in both the saturated and unsaturated zone.

The saturated zone model consists of a finite number of elements with quasi three-dimensional flow. This means a schematization into vertical flow in aquitards and horizontal flow in aquifers (QUERNER, 1984, part 1). To save on computational efforts the region to be modelled is subdivided into subregions, each having relative homogeneous soil properties and hydrological conditions. Each subregion is further subdivided into different areas that are characterized by its land-use denoted as technologies.

The model of the unsaturated zone has a relative simple approach to simulate the water behaviour. Two reservoirs are present, one for the root zone and one for the subsoil, being the part between the root zone and the groundwater level. For the root zone a water balance is calculated taking the equilibrium soil water content as a maximum. The inflows from this reservoir are natural rainfall, artificial rainfall, i.e. sprinkling, evapotranspiration, and capillary rise/percolation. If the equilibrium soil water content is exceeded, then percolation occurs, otherwise capillary rise takes place. From the water balance of the subsoil the change in groundwater table depth is calculated, using a storage coefficient that is dependent on the depth of the groundwater level. Potential evapotranspiration is reduced according to the relative soil water content in the root zone. For a detailed description of the hydrological model FEMSATP see QUERNER and VAN BAKEL (1984).

Actual evapotranspiration is the main link between the hydrological model FEMSATP and the crop production model SIMCROP. Evapotranspiration rate as calculated in the hydrological model is partitioned over transpiration and soil evaporation as a function of

leaf area index.

A crop production model that quantifies the effects of water management on dry matter crop yield has been developed by FEDDES, KOWALIK and ZARADNY (1978). They have given a mathematical formulation of crop growth rate as a hyperbolic function of (normalized) transpiration. The production of a crop each day depends on a water use efficiency factor and the potential growth rate during that day, being mainly determined by solar radiation.

Crop parameters have been derived mainly by taking measurements in the field over a number of years. Ideally such production models should be applied separately for each type of crop. Unfortunately the parameters have not been determined for all crop species sofar. Therefore the estimation of the agricultural production for a region has been based mainly on the production of potatoes. For potatoes long year experiments are available and the model has been verified extensively (FEDDES, WESSELING and WIEBING, 1984). Therefore the yield for other crops is related to the production of potatoes.

For each technology in a subregion the potential and actual yield is calculated. Subsequent this yield is corrected for differences in nutrient supply. At least the yields that theoretically can be obtained are multiplied by a factor to reach yields found in practice. In Fig. 1 a flow chart of the crop production method performed in the model SIMCROP is shown.

From the agricultural yield the income is calculated. The income is based on a fixed market price per technology and all costs directly related to the production of a crop.

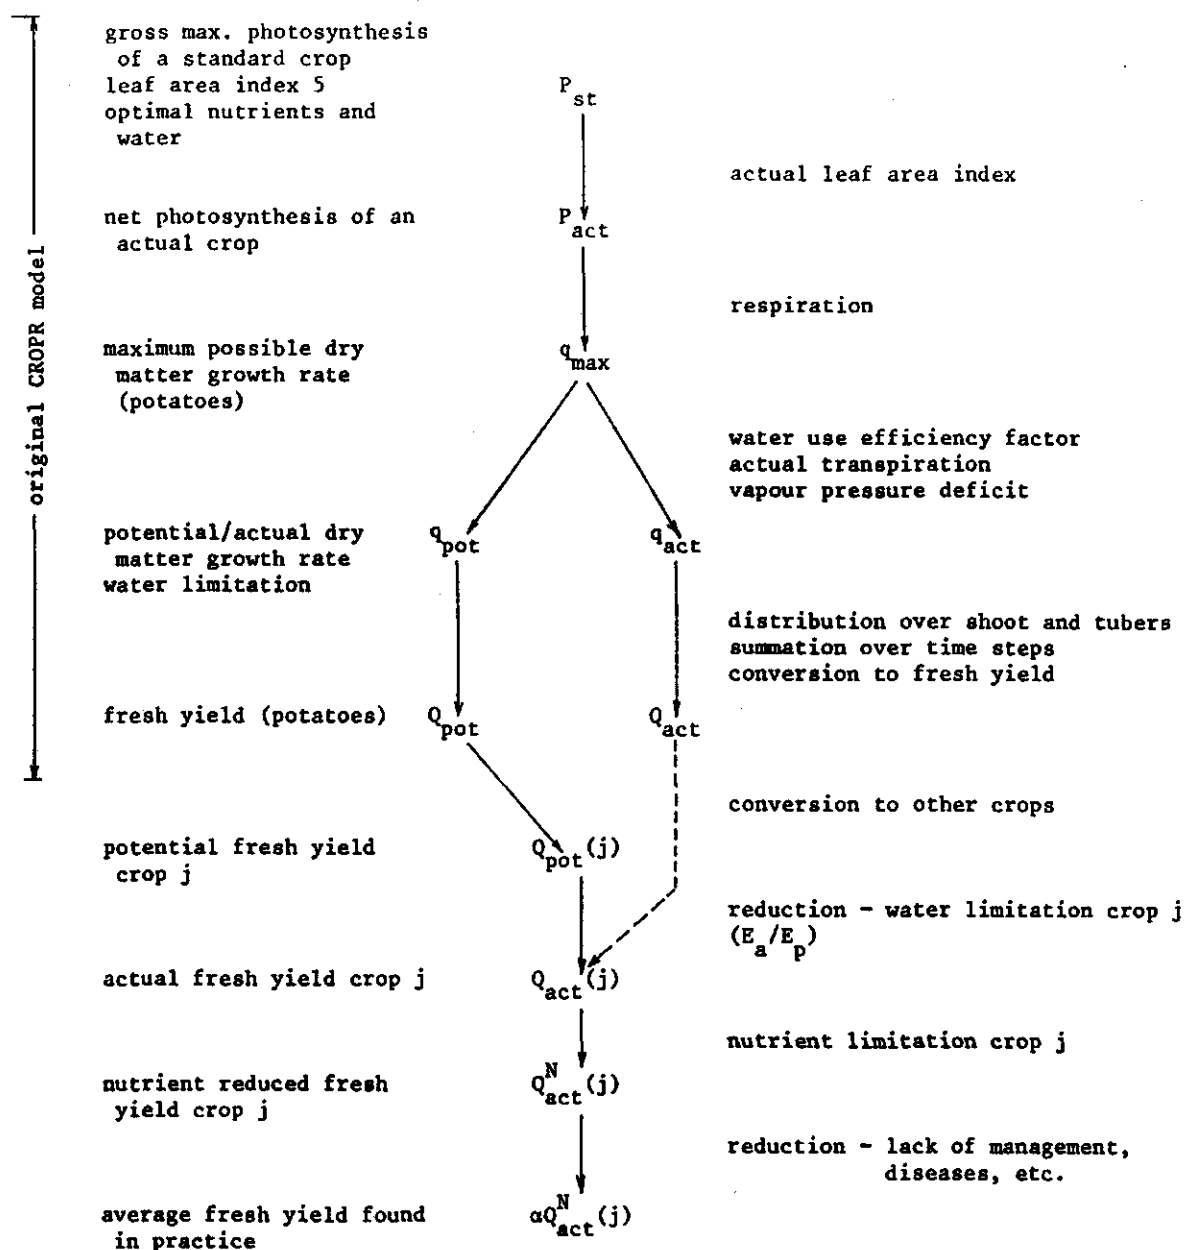


Figure 1 - Flow chart of calculation method to derive at crop productions per technology

3. CALCULATION OF CROP PRODUCTION

3.1. General theory

To estimate crop production FEDDES et al. (1978) gives a mathematical derivation of crop growth as a hyperbolic function of the growth factor water with the maximum growth rate as the upper limit and the efficiency of utilization of this factor as the initial slope of the hyperbola (Fig. 2).

Daily actual dry matter growth rate q_{act} having optimal nutrient supply can be calculated as (FEDDES et al, 1978) :

$$\left(1 - \frac{q_{act}}{A \cdot T / \Delta e}\right) \left(1 - \frac{q_{max}}{q_{max}}\right) = \zeta \quad (1)$$

where A is the maximum water use efficiency determined from field experiments, T is the transpiration rate, Δe is the average vapour pressure deficit of the air, q_{max} is the maximum possible growth rate, and ζ is a mathematical parameter. The relationship is depicted in Fig. 2.

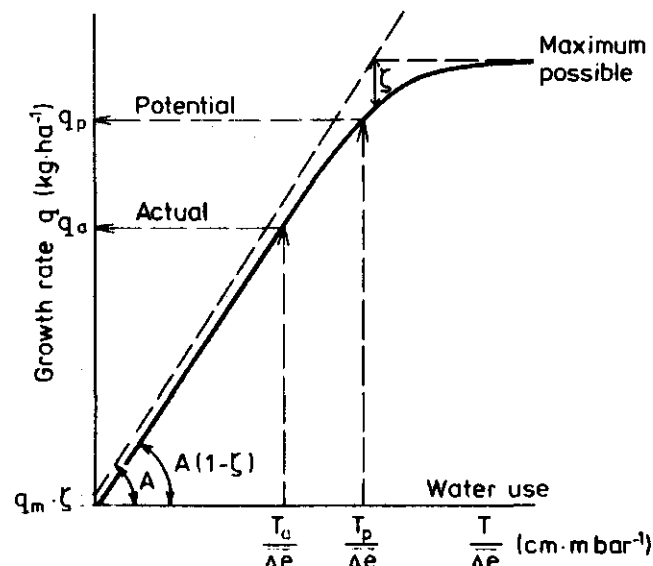


Figure 2 - Actual growth rate versus the growth factor water described as a non-rectangular hyperbola

The maximum possible growth rate is derived from the gross maximum photosynthesis rate of a 'standard' canopy. A 'standard' canopy is defined as a canopy with a leaf area index 5 (5 m² of leaves per square metre of soil surface) which is fully supplied with water and nutrients. Under actual field conditions these maximum growth rates will never be reached and corrections are made to derive the actual growth rate. The calculation of maximum possible, potential and actual crop production is given in the following two paragraphs.

3.1.1 Maximum possible growth rate

The gross maximum photosynthesis rate P_{st} of a 'standard' canopy with leaf area index $I = 5$ (ha leaves/ha soil area) that is fully supplied with water and nutrients can on any day and place at earth be found as :

$$P_{st} = P_o + (1-\lambda) P_c \quad (\text{kg.CH}_2\text{O.ha}^{-1}.\text{d}^{-1}) \quad (2)$$

where λ is the fraction of time the sky under the actual conditions is overcast, P_o and P_c are the gross photosynthesis rate of a standard canopy on an overcast respectively a clear day. The value of λ can be found from the expression :

$$\lambda = \frac{R_c - 0.5 R_s}{0.8 R_c} \quad (3)$$

where R_c is the part of solar radiation flux that is involved in photosynthesis on clear days (0.4 - 0.7 μm), and R_s is the short wave global radiation flux. The daily totals for R_c , P_o and P_c for various times of the year and at different latitudes have been calculated by GOUDRIAAN and VAN LAAR (1978). The annual variation at 52° north latitude (The Netherlands) is shown in Fig. 3.

P_c, P_o (kg $CH_2O \cdot ha^{-1} \cdot day^{-1}$)

R_c ($W \cdot m^{-2}$)

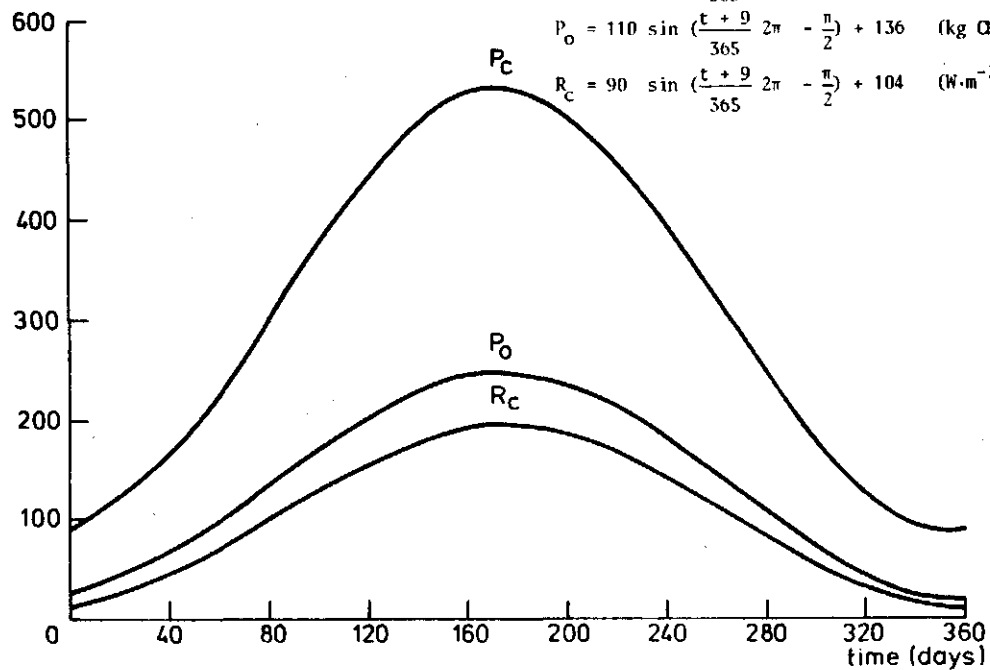


Figure 3 - Annual variation of gross photosynthesis for The Netherlands (standard canopy)

For an actual crop with leaf area index smaller than 5 an exponential extinction of photosynthetic radiation can be assumed, and gross photosynthesis can be expressed as :

$$P_{act} = P_{st} (1 - e^{-\gamma I}) \quad (kg \cdot CH_2O \cdot ha^{-1} \cdot d^{-1}) \quad (4)$$

where I is the leaf area index and γ is the radiation extinction factor ranging from 0.6 to 0.8.

Part of the assimilated carbohydrates, CH_2O , will be utilized for maintenance respiration and growth respiration. Maintenance respiration X_m is proportional to dry matter weight and strongly dependent on temperature, such that :

$$X_m = 0.01 Q_t 2^{(T-25/10)} \quad (kg \cdot CH_2O \cdot ha^{-1} \cdot d^{-1}) \quad (5)$$

where Q_t is the total potential yield of potatoes (shoot and tubers) and T is the air temperature. Growth respiration can be accounted for by a simple efficiency factor c of converting carbohydrates into structural plant material ($c \approx 0.7$). The maximum possible dry

matter growth rate can now be expressed as :

$$q_m = [P_{st}(1-e^{-\gamma I}) - X_m] c \quad (\text{kg.DM.ha}^{-1}.\text{d}^{-1}) \quad (6)$$

3.1.2 Potential and actual production

When solving eq. (1) for the actual dry matter growth rate q_{act} and actual transpiration rate T_a , one obtains :

$$q_{act} = 0.5 \left[A \frac{T_a}{\Delta e} + q_{max} - \left\{ \left(q_{max} + A \frac{T_a}{\Delta e} \right)^2 - 4 q_{max} A \frac{T_a}{\Delta e} (1-\zeta) \right\}^{0.5} \right] \quad (\text{kg.DM.ha}^{-1}.\text{d}^{-1}) \quad (7)$$

In a similar way one can calculate potential growth rate q_{pot} at potential transpiration rate T_p .

The development of a crop with time varies from year to year, depending on environmental conditions such as temperature, day length, soil water content in the root zone, etc. Therefore a dimensionless development stage D_s of a crop has been introduced as :

$$D_s = \frac{t - t_e}{t_h - t_e} \quad (8)$$

where t is the time considered, t_e is the emergence date and t_h is the harvest date. When t_e and t_h are known, D_s can be computed for each value of t .

3.2. Yield of potatoes

The maximum water use efficiency factor, A , required in Eq. (7) for potatoes has been determined from field experiments. In Appendix B this factor is given for the years 1970 to 1981.

Analysis of long year field experiments of two different potato varieties showed that variation of soil cover S_c with the development stage is approximately constant over the years (Fig. 4a). Because there exists a fixed relationship between the leaf area index I (ha leaves/ha soil) and fraction of soil cover S_c :

$$I = 2.6 S_c + 1.5 S_c^2 + 0.9 S_c^3 \quad (9)$$

one can link soil cover to leaf area index at various crop development stages.

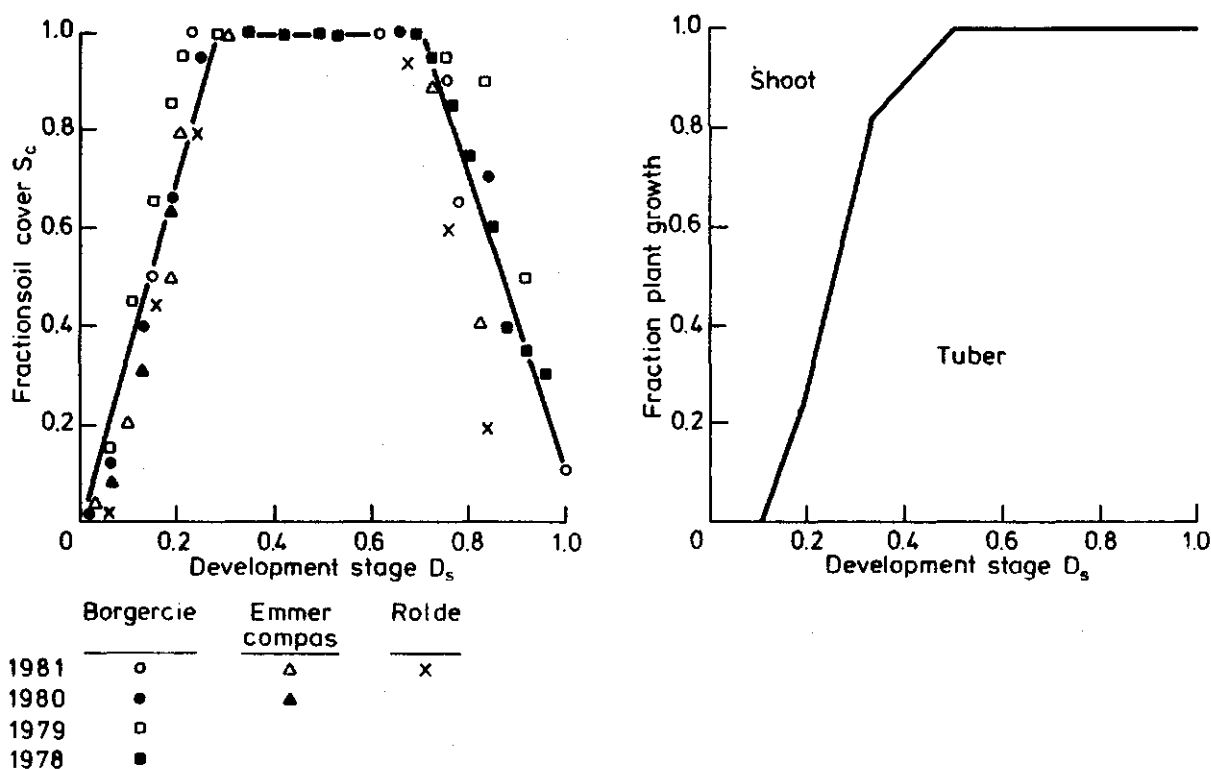


Figure 4 a - Variation of soil cover with development stage for potatoes grown at different places over a number of years

b - Distribution of increase in total dry matter production over shoot and tubers

The hydrological model FEMSATP calculates evaporation from plant and soil, i.e. evapotranspiration. Therefore partitioning of evapotranspiration in transpiration and soil evaporation as a function of leaf area index is required. FEDDES et al (1986) derived a relationship which is shown in Fig. 5. The relationship has been

derived for potatoes and sugar beet. For the derivation it has been assumed that the soil surface is dry. The sum of evaporation from soil, transpiration from plant and evaporation of plant intercepted water is the total loss in water. The total water loss minus the evaporation of plant intercepted water is assumed to be equal to the potential evapotranspiration if one considers a dry surface. Therefore one can write potential evapotranspiration as :

$$E_p = T_p + E_a^{\text{soil}}$$

Depending on the development stage, the increase in total dry matter for each time step is distributed over the shoot and tubers (Fig. 4b). Having calculated actual growth rate, final dry matter yield of potatoes is obtained by summation of the production per time step from emergence to harvest time. The length of the time step used depends on the output of evapotranspiration rates from the hydrological model FEMSATP.

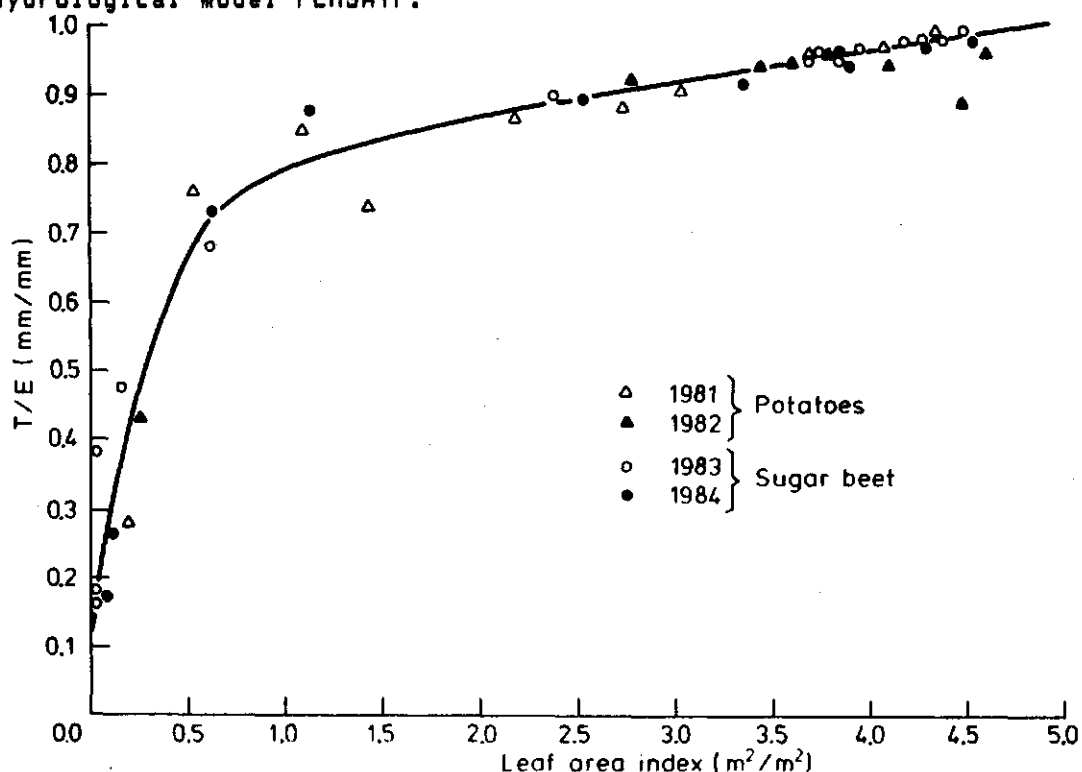


Figure 5 - Transpiration as a fraction of evapotranspiration depending on leaf area index (FEDDES et al, 1986)

3.3. Yield of other crops

Potato dry matter yield is converted to total fresh yield by means of a factor, for which the value 4.7 is used (measured dry matter is 21 % of total fresh yield). Having calculated this actual yield $Q_{act}(p)$ and potential yield $Q_{pot}(p)$ yield of potatoes, the potential yield of other crops j is estimated as :

$$Q_{pot}(j) = F(j) * Q_{pot}(p) \quad (kg.ha^{-1}.d^{-1}) \quad (10)$$

where $F(j)$ is the conversion factor to derive the potential production for the crop considered. As an example conversion factor $F(j)$ for various crops applicable for the Southern Peel region are given in Appendix A. Actual fresh yield is calculated as :

$$Q_{act}(j) = \frac{E_a(j)}{E_p(j)} * Q_{pot}(j) \quad (kg.ha^{-1}.d^{-1}) \quad (11)$$

where the ratio actual, E_a , to potential, E_p , evapotranspiration is considered over the period from emergence to harvest time of the crop.

3.4. Nutrient application

Having obtained the yield under optimal nutrient supply, one has to correct for the actual nutrient supply, of which nitrogen is the most important. A reduction factor n dependent on the ratio actual to optimal nitrogen supply is introduced (FEDDES and RIJTEMA, 1983) as :

$$n = 1 - a(1 - N_a/N_o)^b \quad \text{for} \quad 0 \leq N_a/N_o \leq 1 \quad (12)$$

$$n = 1 - c(N_a/N_o - 1)^d \quad \text{for} \quad N_a/N_o > 1 \quad (13)$$

where N_a is the amount of nitrogen applied plus the amount available in the soil and N_o is the demand for optimal crop production. The coefficients a to d are derived from the lines shown in Fig. 6 and given in Table 1.

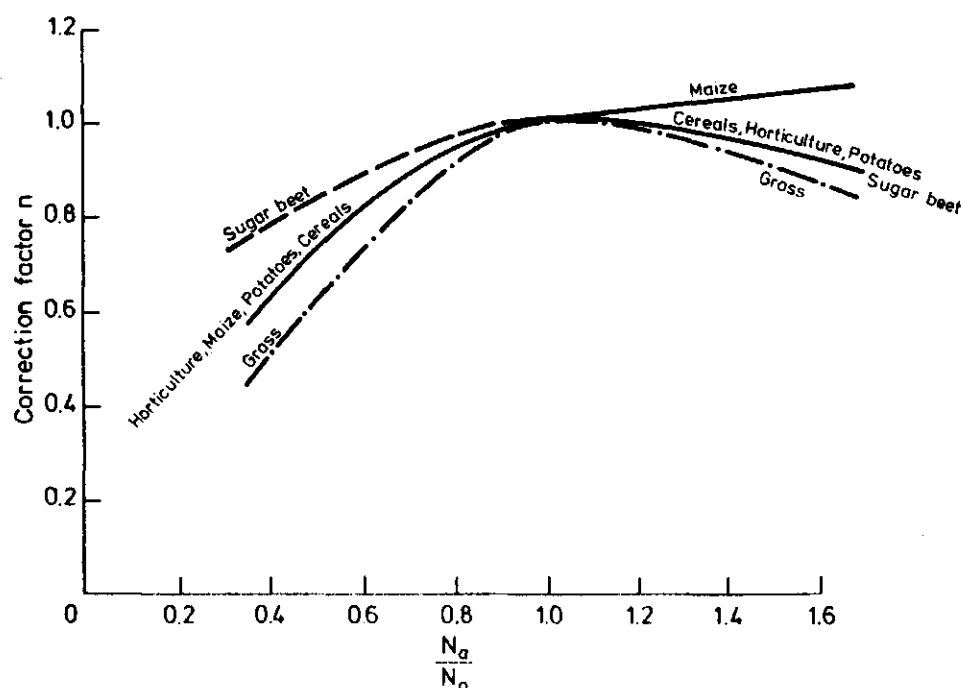


Figure 6 - Reduction in crop production dependent on the amount of nitrogen applied plus that available in the soil

Table 1 - Values of the coefficients used in eqs (12) and (13) for different groups of crops

crop	a	b	c	d
grass	1.147	1.618	0.168	1.576
cereals, row crops	0.859	1.683	0.302	1.688
maize	0.859	1.683	-0.060	0.333
horticulture	0.859	1.683	0.302	1.688

Up to now the calculated potential and actual yields should be considered as yields that theoretically can be obtained. One one has to correct these yields for factors other then included in the model. These factors are for instance reduction due to lack of management, occurence of diseases, etc. Hence the actual yield has been multiplied by a 'lumped' factor α (0.65 - 0.85) to reach at fresh yields that are found in practice.

4. INCOME

The income from agricultural crop productions can be determined as :

$$Y(j) = Q_{act}(j) * M(j) - C(j) \quad (14)$$

where $M(j)$ is the market price and $C(j)$ are all costs related to the production process. Production costs independent of the yield are replacements costs, planting material, fuel, weed control, plant protection, insurances, ect. Costs dependent on the yield are chemical fertiliser, waste application and sprinkling energy costs. The market prices for various crops are listed in Appendix A. Production costs for various technologies in the Southern Peel region were determined by REINDS (1985).

5. EXAMPLES

To demonstrate the use of the models FEMSATP and SIMCROP some water management scenarios were calculated. First the hydrological model is run for a specific case. Results in the form of evapotranspiration rates and sprinkling quantities are subsequent part of the input data for the agricultural model. The examples discussed in the following paragraphs are performed for the Southern Peel region.

5.1. Groundwater extraction

In the Southern Peel region a pumpstation for public water supply is located near Vlierden (see Fig. 7 of QUERNER and VAN BAKEL, 1984). The present capacity of this pumpstation is approximately $10000 \text{ m}^3/\text{d}$. If the pumping rate is double the present capacity, then the income from agricultural productions for the entire region reduces as shown in Table 2. For the very dry summer of 1976 the reduction in income becomes significant. If we consider the reduction in income over the increased extraction, then every cubic meter of additional extracted water costs dfl 0.11. In these calculations we consider fixed prices per crop and no variation of emergence and harvest time over the years. An optimal nutrient supply is considered as well.

Table 2 - Income from agricultural productions in Southern Peel region for extraction at Vlierden of $10000 \text{ m}^3/\text{d}$ (present situation) and $20000 \text{ m}^3/\text{d}$ (hypothetical situation)

growing season	mln dfl		weather conditions
	$10000 \text{ m}^3/\text{d}$	$20000 \text{ m}^3/\text{d}$	
1974	144.4	144.3	wet
1975	143.8	143.6	dry
1976	133.6	133.2	very dry

5.2. Sprinkling

The efficiency of sprinkling on a regional level can be judged from calculations with and without sprinkler irrigation. The results of the hydrological model and the crop production and income model are shown in Table 3. The market prices used for the calculations are given in Appendix A. For the production costs the figures as reported by REINDS (1985) were used. For the replacement cost of sprinkling equipment a figure of dfl 610 /ha has been used and for energy a figure of dfl 0.70 /mm water sprinkled (cost of labour not included). The results in Table 3 give a good indication of the effect of sprinkling on a regional level. The results are very much influenced by the technologies present in the Southern Peel region. For some crops the difference in income per hectare is given in Table 4. The typical crops falling under the term small scale and large scale horticulture are given in Appendix A.

Table 3 - Results of calculations from FEMSATP and SIMCROP with and without sprinkling. Nomenclature used : E_a , evapotranspiration; i_s , sprinkling from surface water; i_g , sprinkling from groundwater

FEMSATP				
	no sprinkling	sprinkling		
	E_a (mm)	E_a (mm)	$i_s + i_g$ (mm)	$E_a / (i_s + i_g)$ %
1974	421	423	26	8
1975	396	408	38	32
1976	344	380	81	44

SIMCROP		
income in mln dfl		
	no sprinkling	sprinkling
1974	147.9	145.1 (-1.9 %)
1975	143.7	142.8 (-0.6 %)
1976	127.0	133.9 (+5.4 %)

Table 4 - Effect of sprinkling on income for some technologies present in the Southern Peel region (I - no sprinkling; II - sprinkling with capacity as per 1982)

technology	income in dfl/ha			
	1974	1975	1976	
small scale hort.	26010	25450	22470	I
	25770	25500	30420	II
large scale hort.	2310	1570	310	I
	1710	1920	2370	II
potatoes/sugar beet	3760	3660	2160	I
	3140	3330	3430	II
maize	1310	990	410	I
	660	900	870	II

6. REFERENCES

- BELMANS, C., J.G. WESSELING and R.A. FEDDES, 1983. Simulation model of the water balance of a cropped soil: SWATRE. J. of Hydrology, Vol 63, pp. 271 - 286
- FEDDES, R.A., P.J. KOWALIK and H. ZARADNY, 1978. Simulation of field water use and crop yield. Simul. Mon., Pudoc, Wageningen, 189 pp.
- FEDDES, R.A. and P.E. RIJTEMA, 1983. Calculation of actual evaporation and crop production for the Southern Peel area. ICW, Wageningen, The Netherlands, Nota 1421, 10 pp.
- FEDDES, R.A., J.G. WESSELING and R. WIEBING, 1984. Simulation of transpiration and yield of potatoes with the SWACRO model. 9th Triennial Conference of the European Ass. for Potato Research (EAPR), Interlaken, Switzerland, 1 - 6 july, pp. 346 - 348
- FEDDES, R.A., 1984. Crop water use and dry matter production : state of the art. Conference Internationale de la CIID sur les Besoins en eau des Cultures, Paris, 11 - 14 sept., 14 pp.
- FEDDES, R.A., W.A.J.M. KROONEN and M. de GRAAF, 1986. Water balance, water use and production of potatoes (1981-82) and sugarbeets (1983-84) on the sprinkling experimental field Sinderhoeve. ICW, Wageningen, The Netherlands (in press).
- GOUDRIAAN, J. and H.H. van LAAR, 1978. Calculation of daily totals of the gross CO₂ assimilation of leaf canopies. Neth. J. Agric. Sci., vol 26, pp. 373 - 382
- QUERNER, E.P., 1984. Program FEMSAT, Part 1 - Calculation method for steady and unsteady groundwater flow. ICW Wageningen The Netherlands, Nota 1557, 23 pp.

QUERNER, E.P. and P.J.T. VAN BAKEL, 1984. Description of second level water quantity model, including results. ICW, Wageningen, The Netherlands, Nota 1586, 67 pp.

PAGV, 1984. Quantitative information 1984-1985 (in Dutch)
Proefstation voor de Akkerbouw en de Groenteteelt in de Volle grond.

REINDS, G.H., 1985. The farm technology in the Southern Peel. ICW, Wageningen, The Netherlands, Nota 1653, 25 pp.

7. LIST OF SYMBOLS

A	- maximum water use efficiency factor
C	- costs related to crop production process
D_s	- development stage
E_a	- actual evapotranspiration rate
E_p	- potential evapotranspiration rate
F	- conversion factor between production of potatoes and other crop species
I	- leaf area index
M	- market price
N_a	- amount of nitrogen applied plus available in the soil
N_o	- nitrogen demand for optimal crop production
P_{act}	- actual photosynthesis rate
P_c	- gross photosynthesis rate on clear day
P_o	- gross photosynthesis rate on overcast day
P_{st}	- gross maximum photosynthesis rate
q_{act}	- actual dry matter growth rate per timestep
q_{max}	- maximum possible dry matter growth rate per timestep
Q_{act}	- actual fresh yield
Q_{pot}	- potential fresh yield
Q_t	- total potential yield of shoot and tubers
R_c	- solar radiation flux
R_s	- short wave global radiation flux
S_c	- soil cover
t	- time
t_e	- emergence date
t_h	- harvest date
T	- temperature
T_a	- actual transpiration
T_p	- potential transpiration
X_m	- maintenance respiration
Y	- income
Δe	- vapour pressure deficit of the air
ω	- fraction of time sky is overcast
ζ	- mathematical parameter
α	- 'lumped' factor to convert theoretical yields to yields found in practice

Appendix A - Conversion factors and market prices

From yields found in practice the conversion factors $F(j)$ used to estimate crop yield from the yield of potatoes are based on information collected by PAGV (1984). Also the current market prices are from this source. The total (fresh) yield, the conversion factor to derive at productions per crop from production of potatoes and the market prices are listed in the table below. The figures are applicable for typical sandy soils in the south western part of The Netherlands - Southern Peel region.

technology	total yield	factor	market price
/crop	kg		dfl/kg
potatoes	45000	1.00	0.15
sugarbeets	54000	1.20	0.11
maize	48000	1.07	0.06
cereals			
- barley	7700	0.17	0.35
- rye	8200	0.18	0.30
small scale hort.	42650	0.94	0.83
- leek	40000	0.89	0.84
- schozonera	17000	0.38	0.48
- pole snap beans			
- strawberries	16000	0.35	2.90
- ridge cucumbers	65000	1.44	0.80
- carrots	65000	1.44	0.19
large scale hort.	10840	0.24	0.61
- garden peas	4600	0.10	0.76
- broad beans	11000	0.22	0.36
- brussels sprouts	20000	0.44	0.90
- witloof chicory	28000	0.62	0.30
grassland			
- dairy cattle	75000	1.66	0.07
- rearing cattle	75000	1.66	0.07

It should be noted that for grassland used for rearing cattle the nutrient supply is in general lower then required for optimal grass production (e.g. amount of nitrogen applied plus available in the

soil is 60 - 80 % of nitrogen demand required for optimal crop production).

Typical crop growing periods for various crops used for the calculations is given below :

crop	day no	
	emergence	harvest
small scale hort.	106	305
large scale hort.	106	274
potatoes	121	258
cereals	80	220
maize	140	290
grassland	60	305

Appendix B - Typical parameters for potato production

The maximum water use efficiency factor for some years are given below :

year	A	year	A
1970	3000	1976	4300
1971	2800	1977	2100
1972	2000	1978	2500
1973	3000	1979	2200
1974	2000	1980	2800
1975	3300	1981	2400

The production of potatoes is calculated as dry matter. These amounts are converted to total fresh yield with a conversion factor (dry matter yield is 21 % of total fresh yield).

For the Southern Peel region the derived conversion between theoretical production and production of the 'average' farmer has been estimated as 0.73.

original CROPR model

gross max. photosynthesis
of a standard crop
leaf area index 5
optimal nutrients and
water

net photosynthesis of an
actual crop

maximum possible dry
matter growth rate
(potatoes)

potential/actual dry
matter growth rate
water limitation

fresh yield (potatoes)

potential fresh yield
crop j

actual fresh yield crop j

nutrient reduced fresh
yield crop j

average fresh yield found
in practice

P_{st}

P_{act}

q_{max}

q_{pot}

q_{act}

Q_{pot}

Q_{act}

$Q_{pot}(j)$

$Q_{act}(j)$

$Q_{act}^N(j)$

$\alpha Q_{act}^N(j)$

actual leaf area index

respiration

water use efficiency factor
actual transpiration
vapour pressure deficit

distribution over shoot and tubers
summation over time steps
conversion to fresh yield

conversion to other crops

reduction - water limitation crop j
(E_a/E_p)

nutrient limitation crop j

reduction - lack of management,
diseases, etc.